

Structured Sparse Subspace Clustering: A Joint Affinity Learning and Subspace Clustering Framework

Chun-Guang Li, *Member, IEEE*, Chong You, and René Vidal, *Fellow, IEEE*

Abstract—Subspace clustering refers to the problem of segmenting data drawn from a union of subspaces. State of the art approaches for solving this problem follow a two-stage approach. In the first step, an affinity matrix is learned from the data using sparse or low-rank minimization techniques. In the second step, the segmentation is found by applying spectral clustering to this affinity. While this approach has led to state-of-the-art results in many applications, it is sub-optimal because it does not exploit the fact that the affinity and the segmentation depend on each other. In this paper, we propose a joint optimization framework — Structured Sparse Subspace Clustering (S^3C) — for learning both the affinity and the segmentation. The proposed S^3C framework is based on expressing each data point as a structured sparse linear combination of all other data points, where the structure is induced by a norm that depends on the unknown segmentation. Moreover, we extend the proposed S^3C framework into Constrained Structured Sparse Subspace Clustering (CS^3C) in which available partial side-information is incorporated into the stage of learning the affinity. We show that both the structured sparse representation and the segmentation can be found via a combination of an alternating direction method of multipliers with spectral clustering. Experiments on a synthetic data set, the Extended Yale B data set, the Hopkins 155 motion segmentation database, and three cancer data sets demonstrate the effectiveness of our approach.

Index Terms—Structured sparse subspace clustering, sparse subspace clustering, spectral clustering, alternating direction method of multipliers

I. INTRODUCTION

In many real-world applications, we need to deal with high-dimensional datasets, such as images, videos, text, and more. In practice, such high-dimensional datasets can often be well approximated by multiple low-dimensional subspaces corresponding to multiple classes or categories. For example, the feature point trajectories associated with a rigidly moving object in a video lie in an affine subspace (of dimension up to 3) [1], and face images of a subject under varying illumination lie in a linear subspace (of dimension up to 9) [2]. Therefore, the task, known in the literature as *subspace clustering*, is to segment the data into their corresponding subspaces. This problem has many applications, e.g., image representation and compression [3], motion segmentation [4], [5], and temporal video segmentation [6] in computer vision;

hybrid system identification in control [7]; and community clustering in social networks [8].

Previous Work. The subspace clustering problem has received a lot of attention over the past few years and many methods have been developed, including iterative methods [9], [10], [11], [12], algebraic methods [6], [13], [14], [15], statistical methods [16], [17], [18], [19], [20], [21], and spectral clustering based methods [22], [23], [24], [25], [26], [27], [28], [29], [30], [31], [32], [33], [34], [35], [36], [37], [38], [39], [40], [41] (see [42] for details). Among them, methods based on spectral clustering have become extremely popular. Such methods divide the problem in two steps. In the first one, an affinity matrix is learned from the data. In the second one, spectral clustering is applied to this affinity. Arguably, the first step is the most important, as the success of the spectral clustering algorithm is largely dependent on constructing an informative affinity matrix.

Recent methods for learning the affinity matrix are based on the self-expressiveness model, which states that a point in a union of subspaces can be expressed as a linear combination of other data points, i.e., $X = XC$, where $X \in \mathbb{R}^{D \times N}$ is the data matrix containing N data points as its columns, and $C \in \mathbb{R}^{N \times N}$ is the matrix of coefficients, also known as the *representation matrix*. With corrupted data, this constraint is relaxed to $X = XC + E$, where E is a matrix of errors. The self-expressiveness model is then formulated as the following optimization problem:

$$\min_{C, E} \|C\|_C + \lambda \|E\|_E \quad \text{s.t.} \quad X = XC + E, \quad \text{diag}(C) = 0, \quad (1)$$

where $\|\cdot\|_C$ and $\|\cdot\|_E$ are two properly chosen norms, $\lambda > 0$ is a tradeoff parameter, and the constraint $\text{diag}(C) = 0$ is optionally used when $\|C\|_C = \|C\|_1$ to rule out the trivial solution of C being an identity matrix.

The primary difference between different methods lies in the choice of regularization on C and/or the noise term E . Currently, the ℓ_0 norm, ℓ_1 norm, ℓ_2 norm or the Frobenius norm, the nuclear norm ($\|\cdot\|_*$) [43], the TraceLasso norm [44], and mixtures of some of them, e.g., $\ell_1 + \ell_2$, $\ell_1 + \|\cdot\|_*$, $\ell_{2,1}$, have been well exploited as the choices of regularization. For example, in Sparse Subspace Clustering (SSC) [27], [28], [45] the ℓ_1 norm is used for $\|\cdot\|_C$ as a convex surrogate over the ℓ_0 norm to promote sparseness in C , and the Frobenius norm and/or the ℓ_1 norm of E is used to handle Gaussian noise and/or outlying entries; in Low-Rank Representation (LRR) [29], [30], Low-Rank Subspace Clustering (LRSC)

C.-G. Li is with the School of Information and Communication Engineering, the Beijing University of Posts and Telecommunications, Beijing 100876, P.R. China. E-mail: lichunguang@bupt.edu.cn.

C. You and R. Vidal are with the Center for Imaging Science, the Johns Hopkins University, Baltimore, MD 21218, USA. E-mail: {cyou, rvidal}@cis.jhu.edu.

[31], [32], and Multiple Subspace Recovery (MSR) [46], the nuclear norm $\|\cdot\|_*$ is adopted for $\|\cdot\|_C$ as a convex surrogate of the rank function, the $\ell_{2,1}$ norm of E is used to tackle outliers (in LRR), the ℓ_1 norm of E is used to handle outlying entries (in MSR), and the Frobenius norm and/or the ℓ_1 norm of E is used to handle Gaussian noise and/or outlying entries (in LRSC); in LSR [33], the Frobenius norm is used for $\|\cdot\|_C$ and $\|\cdot\|_E$ to regularize the representation matrix C and to handle the Gaussian noise E ; in Correlation Adaptive Subspace Segmentation (CASS) [34], Low-Rank Sparse Subspace Clustering (LRSSC) [36], and Elastic Net Subspace Clustering [47], the TraceLasso norm, the mixture of $\ell_1 + \|\cdot\|_*$, and the mixture of $\ell_1 + \ell_2$ norm are employed as $\|\cdot\|_C$, respectively, to gain a balance between connectivity and correctness. In addition, locality or spatial information has also been adopted for weighting or regularization on C , e.g., [48], [35], [49]. Recently, the sparsity based greedy methods are also proposed to gain the scalability, e.g., Thresholding Subspace Clustering (TSC) [38], Orthogonal Matching Pursuit (OMP) [37], [45] and Nearest Subspace Neighbor (NSN) [40].

Once the matrix of coefficients C has been found by any of the methods above, the segmentation of the data is obtained by applying spectral clustering to an affinity matrix induced from C , e.g., $|C| + |C^\top|$.

While the above approaches have been incredibly successful in many applications, an important disadvantage is that they divide the problem into two separate stages: affinity learning (using, e.g., SSC, LRR, LRSC, LSR) and spectral clustering. Dividing the problem in two steps is, on the one hand, appealing because the first step can be solved using convex optimization techniques, while the second step can be solved using existing spectral clustering techniques. On the other hand, its major disadvantage is that the natural relationship between the affinity matrix and the segmentation of the data is not explicitly captured.

In this paper, we attempt to integrate these two separate stages into one unified optimization framework. One important observation is that a perfect subspace clustering can often be obtained from an imperfect affinity matrix. In other words, the spectral clustering step can correct errors in the affinity matrix, which can be viewed as a process of information gain by denoising. Because of this, if we feed back the information gain properly, it may help the self-expressiveness model yield a better affinity matrix. As shown in Fig. 2, the clustering results can help the self-expressiveness model find an improved affinity matrix and thus boost the final clustering results.

Paper Contributions. In this paper, we propose a new approach to subspace clustering called Structured Sparse Subspace Clustering (SSSC or S^3C), which integrates the two separate stages of computing a sparse representation matrix and applying spectral clustering into a unified optimization framework. The proposed approach is based on minimizing a new subspace structured ℓ_1 norm, which augments the ℓ_1 norm with a segmentation dependent term. The resulting optimization problem is solved in an alternating minimization framework where the output of spectral clustering is used to

define a subspace segmentation matrix, which is then used to re-weight the representation matrix in the next iteration. Depending on how the subspace segmentation matrix is defined, we obtain two different implementations of the S^3C framework:

- **Hard S^3C :** in this case the binary output of spectral clustering is used to construct a binary subspace segmentation matrix for re-weighting the representation matrix in the next iteration. This is the approach proposed in the preliminary version of our work [50].
- **Soft S^3C :** in this case the real-valued output of spectral clustering is used to construct a real-valued subspace segmentation matrix for re-weighting the representation matrix in the next iteration. This extension of our preliminary work [50] not only leads to a more principled optimization framework, but also captures more detailed information about the structure of the data, which leads to better clustering results.

In addition, we extend the S^3C framework into a Constrained S^3C (CS^3C) framework, which enables us to perform subspace clustering with the help of partial pairwise side-information (e.g., prior knowledge about which points belong to the same group and which points do not belong to the same group). Finally, we demonstrate the effectiveness of the propose approach on a synthetic data set, the Extended Yale B face data set, the Hopkins 155 motion segmentation database, and three cancer data sets. Experimental results also show that, with the help of some side-information, the clustering accuracy could be improved. Compared to our preliminary work [50], more experimental evaluations and discussions are presented.

Paper Outline. The remainder of this paper is organized as follows. Section II describes our unified optimization framework to address the subspace clustering problem. Section III proposes algorithms for solving the optimization problem associated with our proposed models. Section IV discusses the effects of using the proposed subspace structured norm and the settings of parameters in our proposed models. Section V presents experimental results and Section VI presents the conclusions.

II. A UNIFIED OPTIMIZATION FRAMEWORK FOR SUBSPACE CLUSTERING

This paper is concerned with the following problem.

Problem 1 (Subspace clustering). Let $X \in \mathbb{R}^{D \times N}$ be a real-valued matrix whose columns are drawn from a union of n subspaces of $\mathbb{R}^D$, $\bigcup_{j=1}^n \{S_j\}$, of dimensions $d_j \ll \min\{D, N\}$, for $j = 1, \dots, n$. The goal of subspace clustering is to segment the columns of X into their corresponding subspaces.

To begin with, we introduce some additional notations. Let $Q = [\mathbf{q}_1, \dots, \mathbf{q}_N]$ be an $N \times n$ binary matrix indicating the membership of each data point to each subspace. That is, $q_{ij} = 1$ if the i -th column of X lies in subspace S_j and $q_{ij} = 0$ otherwise. We assume that each data point lies in only one subspace, hence if Q is a valid segmentation matrix, we must have $Q\mathbf{1} = \mathbf{1}$, where $\mathbf{1}$ is the vector of all ones of appropriate dimension. Note that the number of subspaces is equal to n ,

so we must have that $\text{rank}(Q) = n$. Thus, the space of all valid segmentation matrices with n groups is:

$$\mathcal{Q} = \{Q \in \{0, 1\}^{N \times n} : Q\mathbf{1} = \mathbf{1} \text{ and } \text{rank}(Q) = n\}. \quad (2)$$

A. Structured Subspace Clustering: A Unified Framework

Recall from (1) that data in a union of subspaces are self-expressive, that is, each data point in a union of subspaces can be expressed as a linear combination of other data points as $X = XC$ with $\text{diag}(C) = \mathbf{0}$, where $C \in \mathbb{R}^{N \times N}$ is a matrix of coefficients whose (i, j) entry C_{ij} captures the similarity between points i and j . For the purpose of data clustering, we would like the matrix of coefficients to be *subspace-preserving* [51], i.e., $C_{ij} \neq 0$ only if points i and j lie in the same subspace. In existing approaches [28], [29], [33], one searches for a subspace-preserving representation by adding some regularization on C (e.g., ℓ_1 [27], [28], $\|\cdot\|_*$ [29], [30], $\|\cdot\|_F$ [33]) and then solving the optimization program in (1).

Once the representation matrix C is computed, one defines the data affinity matrix as

$$A = \frac{1}{2}(|C| + |C^\top|). \quad (3)$$

Notice that the data affinity matrix A encodes the pairwise similarity and can also be interpreted as a cost matrix, in which each entry A_{ij} specifies a cost for segmenting data points $\mathbf{x}_i$ and $\mathbf{x}_j$ into two different clusters. For a given affinity A , the clustering of the data is obtained by searching for a segmentation matrix Q that minimizes the sum of such costs, i.e.,

$$\min_Q \frac{1}{2} \sum_{i,j} A_{i,j} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2 \quad \text{s.t. } Q \in \mathcal{Q}, \quad (4)$$

where $\mathbf{q}^{(i)}$ and $\mathbf{q}^{(j)}$ are the i -th and j -th row of matrix Q , respectively. In practice, since the search over all $Q \in \mathcal{Q}$ is combinatorial, spectral clustering techniques usually relax the constraint $Q \in \mathcal{Q}$ to $Q^\top Q = I$ and apply k -means to the rows of Q to get the binary segmentation matrix.

The common framework adopted by previous approaches for subspace clustering divides the procedure into two independent steps: compute the representation matrix C , and then apply spectral clustering to the affinity matrix A . Thus, it fails to exploit the correlations between them. Especially, both the representation matrix C and the segmentation matrix Q try to capture the segmentation of the data. In the following, we identify the connections between the objectives in (1) and (4), and show that they can be combined together into a joint objective in which the representation matrix C and the segmentation matrix Q depend on each other.

Note that the goal in the optimization program (4) is to search for a matrix Q that minimizes the segmentation cost with A fixed. Note also that A is defined from matrix C , which in turn is obtained by searching over all possible data self-representation matrices and choosing the one that minimizes the regularization $\|C\|_C$ (i.e., by the optimization program (1)). Thus, we can combine the above two optimizations and search for Q and C at the same time in a joint optimization

framework. First, we rewrite the objective function in (4) in a way that reflects its dependency on both C and Q , and define $\|C\|_Q$ as

$$\begin{aligned} \|C\|_Q &\doteq \sum_{i,j} |C_{ij}| \left(\frac{1}{2} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2 \right) \\ &= \frac{1}{2} \sum_{i,j} A_{i,j} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2, \end{aligned} \quad (5)$$

where A is defined as in (3). Then, our structured subspace clustering framework is defined as follows:

$$\begin{aligned} \min_{C,E,Q} \quad & \alpha \|C\|_Q + \|C\|_C + \lambda \|E\|_\varepsilon \\ \text{s.t.} \quad & X = XC + E, \text{diag}(C) = \mathbf{0}, \quad Q \in \mathcal{Q}, \end{aligned} \quad (6)$$

where $\alpha > 0$ is a trade-off parameter. In this framework, we search jointly for the representation matrix C , which satisfies the data self-expressiveness model $X = XC + E$, $\text{diag}(C) = \mathbf{0}$, and the data segmentation matrix $Q \in \mathcal{Q}$. The regularization term $\|C\|_C$ is as before to induce the optimal solution for C to have the subspace-preserving property.

We creatively identify the term $\|C\|_Q$, which we call a *subspace structured norm*¹ of C with respect to (w.r.t.) Q , that captures the interaction between the representation matrix C and the segmentation matrix Q . In comparison to prior approaches, this term induces a representation matrix C that minimizes the inter-cluster affinity. Note that if C is subspace-preserving, the subspace structured norm $\|C\|_Q$ vanishes; otherwise, it is positive.

The optimization problem in (6) can be solved by alternatively solving (C, E) and Q . Given Q , the problem is a convex program for (C, E) , which can be solve efficiently using the alternating direction method of multipliers (ADMM) [52], [53]. On the other hand, given (C, E) , the solution for Q can be computed approximately by spectral clustering.

B. Structured Sparse Subspace Clustering (S^3C)

Among the many norms used by existing subspace clustering algorithms, including the ℓ_1 norm used by SSC, the nuclear norm used by LRR and LRSC, and the Frobenius norm used by LSR, here we adopt the ℓ_1 norm, and combine $\|C\|_1$ with subspace structured norm $\|C\|_Q$ to define a *subspace structured ℓ_1 norm* of C as

$$\begin{aligned} \|C\|_{1,Q} &\doteq \|C\|_1 + \alpha \|C\|_Q \\ &= \sum_{i,j} |C_{ij}| \left(1 + \frac{\alpha}{2} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2 \right), \end{aligned} \quad (7)$$

where $\alpha > 0$ is a tradeoff parameter. Clearly, the first term is the standard ℓ_1 norm used in SSC. Therefore the subspace structured ℓ_1 norm can be viewed as an ℓ_1 norm augmented by an extra penalty on C_{ij} when points i and j are in different subspaces according to the segmentation matrix Q . The reasons we prefer to use the ℓ_1 norm are two-fold:

- Since both the ℓ_1 norm and the subspace structured norm (w.r.t. Q) are based on the ℓ_1 norm, this leads to a combined norm that also has the structure of the ℓ_1 norm.

¹Strictly, $\|C\|_Q$ is not a norm but a semi-norm of C for a given Q .

We will see later that this will facilitate updating the coefficients of C .

- The second reason to use the ℓ_1 norm is the great theoretical guarantees for correctness enjoyed by SSC, which is able to find subspace-preserving solution even when subspaces are overlapping, or data are noisy, or dimensionality is reduced [54], [55], [56], [57].

Equipped with the *subspace structured* ℓ_1 norm of C , we can reformulate the unified optimization framework in (6) for subspace clustering as follows:

$$\begin{aligned} \min_{C, E, Q} \quad & \|C\|_{1, Q} + \lambda \|E\|_{\varepsilon} \\ \text{s.t.} \quad & X = XC + E, \text{diag}(C) = \mathbf{0}, \quad Q \in \mathcal{Q}, \end{aligned} \quad (8)$$

where the norm $\|\cdot\|_{\varepsilon}$ on the error term E depends upon the prior knowledge about the pattern of noise or corruptions.² We call problem (8) as *Structured Sparse Subspace Clustering* (SSSC or S³C).

Remark 1. The S³C framework in (8) generalizes SSC because, instead of first solving for a sparse representation to find C and then applying spectral clustering to the affinity $|C| + |C^{\top}|$ to obtain the segmentation, in (8) we simultaneously search for the sparse representation C and the segmentation Q . To be more specific, when the parameter α in $\|C\|_{1, Q}$ is set as 0 or Q is initialized as a noninformative matrix, e.g., all zeros, problem (8) for (C, E) reduces to SSC. Thus, we find an initialization for (C, E) by solving problem (8) with $Q = \mathbf{0}$ and $\alpha > 0$ which reduces to SSC.

Remark 2. To cluster affine subspaces, we modify the problem in (8) by adding an affine constraint $\mathbf{1}^{\top} = \mathbf{1}^{\top} C$, which can be merged with constraint $X = XC + E$ as $\tilde{X} = \tilde{X}C + \tilde{E}$ where $\tilde{X}$ is defined by adding an extra row vector $\mathbf{1}^{\top}$ into the bottom of matrix X and $\tilde{E}$ is defined by adding an extra row vector $\mathbf{0}^{\top}$ into the bottom of matrix E .

Remark 3. Our S³C differs from the reweighted ℓ_1 minimization [58] in that what we use to reweight is not C itself but rather a segmentation matrix Q . The attempt to integrate these two stages into a unified framework is also suggested in the work of Feng *et al.* [59], who introduce a block-diagonal constraint into the self-expressiveness model. However, this requires precise knowledge of the segmentation, and therefore enforcing exact block-diagonality is not possible with their model. Compared to [59], which adds an extra block-diagonal constraint into the expressiveness model, our framework encourages consistency between the representation matrix and the estimated segmentation matrix. It should also be noted that our subspace structured norm can be used in conjunction with other self-expressiveness based methods [29], [33], [34], and can also be combined with other weighted methods [48] or methods with extra regularization [49].

²For example, the Frobenius norm will be used for dense Gaussian noise; the ℓ_1 norm will be used for sparse corruptions; the $\ell_{2,1}$ norm will be used for gross corruptions over a few columns; or the combination of these norms will be used for mixed patterns of noise and corruptions.

C. Constrained Structured Sparse Subspace Clustering: An Extension to Incorporate Side Information

In some applications, for example, in the task of clustering genes in DNA microarray data, there often exists prior knowledge about the relationships between some subset of genes or genes expression profiles [61], [62], [63], [64]. This prior knowledge essentially provides partial side-information to indicate “must-link” or “cannot-link” constraints in clustering.

The direct way to incorporate side-information into our S³C framework is to partially initialize the structure matrix Θ with the “cannot-link” constraints in the side-information. Here, we propose to incorporate the side-information to weight the ℓ_1 norm, that is, to modify $\|C\|_1 = \|C \odot \mathbf{1}\mathbf{1}^{\top}\|_1$ into $\|C\|_{\Psi} = \|C \odot \Psi\|_1$, where the operator $\odot$ is the Hadamard product (i.e., element-wise product) and Ψ encodes the side-information as follows:

- $\Psi_{ij} = \exp(-1)$ if data points i and j have a “must-link”, i.e., data points i and j should belong to the same subspace;
- $\Psi_{ij} = \exp(+1)$ if data points i and j have a “cannot-link”, i.e., data points i and j should belong to different subspaces;
- $\Psi_{ij} = 1$ otherwise, i.e., there is no side-information for data points i and j .

Consequently, the subspace structured ℓ_1 norm $\|C\|_{1, Q}$ can be modified to incorporate the side-information Ψ as follows:

$$\begin{aligned} \|C\|_{\Psi, Q} &\doteq \|C \odot \Psi\|_1 + \alpha \|C\|_Q \\ &= \sum_{i,j} |C_{ij}| (\Psi_{ij} + \frac{\alpha}{2} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|^2). \end{aligned} \quad (9)$$

Note that if the side-information is not available, $\|C\|_{\Psi, Q}$ reduces to $\|C\|_{1, Q}$ because the side-information matrix Ψ degenerates to $\mathbf{1}\mathbf{1}^{\top}$. Therefore, we extend the structured sparse subspace clustering problem to incorporate the given side-information by solving the following problem:

$$\begin{aligned} \min_{C, E, Q} \quad & \|C\|_{\Psi, Q} + \lambda \|E\|_{\varepsilon} \\ \text{s.t.} \quad & X = XC + E, \text{diag}(C) = \mathbf{0}, \quad Q \in \mathcal{Q}. \end{aligned} \quad (10)$$

We call problem (10) as *Constrained Structured Sparse Subspace Clustering* (CSSSC or CS³C).

Remark 4. While there are more sophisticated strategies to incorporate the side-information, the reason to adopt a simple weighting approach as in problem (10) is that by doing so we can solve the problem with minor changes to the optimization algorithm, as we will show at the end of Section III-B.

III. ALTERNATING MINIMIZATION ALGORITHMS FOR STRUCTURED SPARSE SUBSPACE CLUSTERING

In this section, we present algorithms to solve the optimization problem (8) by alternating between the following two subproblems:

- 1) Find C and E given Q by solving a subspace structured sparse representation problem.
- 2) Find Q given C and E by spectral clustering.

One way to solve problem (8) as explored in [50] is to alternate between computing the subspace structured sparse

representation and applying spectral clustering. Specifically, in spectral clustering the discrete constraint $Q \in \mathcal{Q}$ is relaxed so that the optimal Q can be computed from the singular value decomposition of the graph Laplacian, then Q is quantized into the valid segmentation set $\mathcal{Q}$ by applying the k -means algorithm. We call this procedure as *hard S³C*.

In hard S³C, a binary segmentation matrix Q is used to re-weight the updating of C in the next iteration. While using a binary segmentation matrix Q is conceptually simple, it may not be capable of capturing the detailed information in the clustering results. Notice that, some data points are easier to segment and thus their clustering results are more reliable, whereas some data points are hard to segment and thus their clustering results are less reliable. Such kind of detailed confidence or uncertainty information in clustering results will be ignored when quantizing the clustering results into a binary segmentation matrix Q . Therefore, instead of quantizing Q by using k -means in each iteration, we propose to use the real-valued matrix $Q \in \mathbb{R}^{N \times n}$ for re-weighting the updating of C in the next iteration. We call this procedure as *soft S³C*. When compared to using a binary Q in hard S³C, the continuous real-valued Q in soft S³C carries more detailed information of the previous clustering results and thus re-weight the updating of representation coefficients matrix C smoothly. This is beneficial to yield better clustering results.

The optimization problem in (10) can be solved with some minor changes in the algorithms for solving problem (8).

A. Subspace Structured Sparse Representation

Given a binary segmentation matrix Q or real-valued matrix Q , we compute the subspace structure matrix Θ where $\Theta_{ij} \doteq \frac{1}{2} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2$ in which $\mathbf{q}^{(i)}$ and $\mathbf{q}^{(j)}$ are the i -th and j -th rows of matrix Q , respectively. Then we solve for C and E by solving the following subspace structured sparse representation problem

$$\begin{aligned} \min_{C, E} \quad & \|C\|_{1, Q} + \lambda \|E\|_{\varepsilon} \\ \text{s.t.} \quad & X = XC + E, \text{diag}(C) = \mathbf{0}, \end{aligned} \quad (11)$$

which is equivalent to the following problem

$$\begin{aligned} \min_{A, C, E} \quad & \|C\|_{1, Q} + \lambda \|E\|_{\varepsilon} \\ \text{s.t.} \quad & X = XA + E, A = C - \text{diag}(C). \end{aligned} \quad (12)$$

We solve this problem using the Alternating Direction Method of Multipliers (ADMM) [53], [52]. The augmented Lagrangian is given by:

$$\begin{aligned} \mathcal{L}(C, A, E, Y, Z) \\ = & \|C\|_{1, Q} + \lambda \|E\|_{\varepsilon} + \langle Y, X - XA - E \rangle \\ & + \langle Z, A - C + \text{diag}(C) \rangle \\ & + \frac{\mu}{2} (\|X - XA - E\|_F^2 + \|A - C + \text{diag}(C)\|_F^2), \end{aligned} \quad (13)$$

where Y and Z are matrices of Lagrange multipliers, and $\mu > 0$ is a parameter. To find a saddle point for $\mathcal{L}$, we update each of C , A , E , Y , and Z alternately while keeping the other variables are fixed.

Algorithm 1 (ADMM for solving problem (12))

Input: Data matrix X , and parameters λ and α .

Initialize: $\Theta = \mathbf{0}$, $E^{(0)} = \mathbf{0}$, $A^{(0)} = \mathbf{0}$, $Y^{(0)} = \mathbf{0}$, $Z^{(0)} = \mathbf{0}$, $\epsilon = 10^{-6}$, $\rho = 1.1$, $\mu^{(0)} = \frac{1}{\min_j \max_{i: i \neq j} \{\mathbf{x}_i^T \mathbf{x}_j\}}$, $t = 0$.

while not converged **do**

 Update $C^{(t+1)}$, $A^{(t+1)}$, and $E^{(t+1)}$;

 Update $Y^{(t+1)}$ and $Z^{(t+1)}$;

 Update $\mu^{(t+1)} \leftarrow \rho \mu^{(t)}$;

 Check the convergence condition $\|X - XA^{(t+1)} - E^{(t+1)}\|_{\infty} < \epsilon$; if not converged, then set $t \leftarrow t + 1$.

end while

Output: $C^{(t+1)}$ and $E^{(t+1)}$

Update for C . We update C by solving the following problem:

$$C^{(t+1)} = \arg \min_C \frac{1}{\mu^{(t)}} \|C\|_{1, Q} + \frac{1}{2} \|C - \text{diag}(C) - U^{(t)}\|_F^2,$$

where $\|C\|_{1, Q} = \|C\|_1 + \alpha \|\Theta \odot C\|_1$ and $U^{(t)} = A^{(t)} + \frac{1}{\mu^{(t)}} Z^{(t)}$. The closed-form solution for C is given as

$$C^{(t+1)} = \tilde{C}^{(t+1)} - \text{diag}(\tilde{C}^{(t+1)}), \quad (14)$$

where the (i, j) entry of $\tilde{C}$ is given by

$$\tilde{C}_{ij}^{(t+1)} = \mathcal{S}_{\frac{1}{\mu^{(t)}(1+\alpha\Theta_{ij})}}(U_{ij}^{(t)}), \quad (15)$$

where $\mathcal{S}_{\tau}(\cdot)$ is the shrinkage thresholding operator. Note that the subspace structured ℓ_1 norm causes a minor change to the algorithm used to compute C from the standard SSC — because of the homogeneity in the two terms. Namely, rather than soft-thresholding all the entries of matrix $U^{(t)}$ uniformly with a constant value, we threshold each entry $U_{ij}^{(t)}$ of matrix $U^{(t)}$ with different value that depends on Θ_{ij} .

Update for A . We update A by solving the following problem:³

$$\begin{aligned} A^{(t+1)} = \arg \min_A \quad & \langle Y^{(t)}, X - XA - E^{(t)} \rangle \\ & + \langle Z^{(t)}, A - C^{(t+1)} \rangle \\ & + \frac{\mu^{(t)}}{2} (\|X - XA - E^{(t)}\|_F^2 + \|A - C^{(t+1)}\|_F^2), \end{aligned}$$

whose solution is given by

$$\begin{aligned} A^{(t+1)} = & (X^T X + \mathbf{I})^{-1} [X^T (X - E^{(t)} - \frac{1}{\mu^{(t)}} Y^{(t)}) \\ & + C^{(t+1)} - \frac{1}{\mu^{(t)}} Z^{(t)}]. \end{aligned} \quad (16)$$

Update for E . While other variables are fixed, we update E as follows:

$$E^{(t+1)} = \arg \min_E \frac{\lambda}{\mu^{(t)}} \|E\|_{\varepsilon} + \frac{1}{2} \|E - V^{(t)}\|_F^2 \quad (17)$$

where $V^{(t)} = X - XA^{(t+1)} + \frac{1}{\mu^{(t)}} Y^{(t)}$. If we use the ℓ_1 norm for E , then

$$E^{(t+1)} = \mathcal{S}_{\frac{\lambda}{\mu^{(t)}}}(V^{(t)}). \quad (18)$$

³Note that $\text{diag}(C^{(t+1)})$ is dropped because it is $\mathbf{0}$ during iterations due to the updating rule in (14).

Update for Y and Z . The update for the Lagrange multipliers is a simple gradient ascent step

$$\begin{aligned} Y^{(t+1)} &= Y^{(t)} + \mu^{(t)}(X - XA^{(t+1)} - E^{(t+1)}), \\ Z^{(t+1)} &= Z^{(t)} + \mu^{(t)}(A^{(t+1)} - C^{(t+1)}). \end{aligned}$$

For clarity, we summarize the ADMM algorithm for solving problem (12) in Algorithm 1. For the details of the derivation, we refer the readers to [53], [52].

B. Spectral Clustering

Given C and E , problem (8) reduces to the following problem:

$$\min_Q \|C\|_Q \quad \text{s.t. } Q \in \mathcal{Q}. \quad (19)$$

By using the definition of the subspace structured norm in (5), problem (19) can be identified as the spectral clustering problem

$$\min_Q \text{trace}(Q^\top \bar{L} Q) \quad \text{s.t. } Q \in \mathcal{Q}, \quad (20)$$

in which $\bar{L}$ is the graph Laplacian of the data affinity matrix $\bar{A}$ defined in (3), i.e., $\bar{L} = \bar{D} - \bar{A}$, $\bar{A} = \frac{1}{2}(|C| + |C^\top|)$, and $\bar{D}$ is the degree matrix with diagonal entries $\bar{D}_{jj} = \sum_i \bar{A}_{ij}$. In particular, when relaxing the constraint $Q \in \mathcal{Q}$ to the constraint $Q^\top \bar{D} Q = I$, we obtain:

$$\min_{Q \in \mathbb{R}^{N \times n}} \alpha \text{trace}(Q^\top \bar{L} Q) \quad \text{s.t. } Q^\top \bar{D} Q = I, \quad (21)$$

then the solution $Q \in \mathcal{Q}$ can be found by spectral clustering with normalized cut [65]. More specifically, let $\tilde{Q} = \bar{D}^{-\frac{1}{2}} Q$, then problem (21) turns out to be:

$$\min_{\tilde{Q} \in \mathbb{R}^{N \times n}} \alpha \text{trace}(\tilde{Q}^\top \bar{D}^{-\frac{1}{2}} \bar{L} \bar{D}^{-\frac{1}{2}} \tilde{Q}) \quad \text{s.t. } \tilde{Q}^\top \tilde{Q} = I. \quad (22)$$

The solution of $\tilde{Q}$ is given by the bottom n eigenvectors of $\bar{D}^{-\frac{1}{2}} \bar{L} \bar{D}^{-\frac{1}{2}}$ associated with its n smallest eigenvalues.

- In hard S^3C , the rows of $\tilde{Q} \in \mathbb{R}^{N \times n}$ are used as the input to the k -means algorithm and the clustering of the rows of $\tilde{Q}$ is used to define the solution of $Q \in \mathcal{Q}$ as $q_{ij} = 1$ if point i belongs to cluster j , and $q_{ij} = 0$ otherwise. Then, we construct a binary subspace structure matrix Θ , where $\Theta_{ij} = \frac{1}{2} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2 \in \{0, 1\}$.
- In soft S^3C , we use the matrix $\tilde{Q} \in \mathbb{R}^{N \times n}$ to construct the subspace structure matrix Θ , where each row of $\tilde{Q}$ is normalized to unit ℓ_2 norm and $\Theta_{ij} = \frac{1}{2} \|\mathbf{q}^{(i)} - \mathbf{q}^{(j)}\|_2^2$.

C. Algorithm Summary

The S^3C algorithms alternate between solving for the matrices of sparse coefficients and the error (C, E) given the segmentation Q using Algorithm 1 and solving for Q given (C, E) using spectral clustering. The hard S^3C defines a binary subspace structure matrix Θ with the clustering indicator matrix Q ; whereas the soft S^3C defines a real-valued subspace structure matrix Θ with matrix $Q \in \mathbb{R}^{N \times n}$. For clarity, we summarize the procedure for solving problem (8) in Algorithm 2.

Algorithm 2 (S^3C)

Input: Data X , number of subspaces n , parameters λ, α
Initialize (C, E) by SSC
while not converged **do**
 Given (C, E) , solve problem (19) via spectral clustering to obtain Q ;
 Given Q , solve problem (11) via Alg. 1 to obtain (C, E) ;
end while
Output: Segmentation matrix Q

Remark 5. To solve CS^3C in (10), we change the step for updating $\tilde{C}_{ij}^{(t+1)}$ in (15) as follows:

$$\tilde{C}_{ij}^{(t+1)} = \mathcal{S}_{\frac{1}{\mu^{(t)}}(\Psi_{ij} + \alpha \Theta_{ij})}(U_{ij}^{(t)}). \quad (23)$$

Note that the side-information encoded in Ψ imposes different effects onto the entries of $\tilde{C}^{(t)}$ in which: a) the entry $\tilde{C}_{ij}^{(t)}$ is penalized more heavily if having a “cannot-link” constraint, and b) the entry $\tilde{C}_{ij}^{(t)}$ is encouraged if having a “must-link” constraint.

IV. DISCUSSION ON EFFECTS OF USING $\|C\|_{1,Q}$, ROLE OF PARAMETER α , AND STOPPING CRITERION

In this section, we discuss the effects of using $\|C\|_{1,Q}$, the role of the parameter α in $\|C\|_{1,Q}$, and the criterion to terminate Algorithm 2.

A. Effects of Using Subspace Structured ℓ_1 Norm

Since the optimization problem for (C, E) is convex but not strongly convex, the optimal solution is not unique.

- Suppose that the optimal solution C is subspace-preserving, then the subspace structured norm $\|C\|_Q$ vanishes whenever Q is the correct segmentation matrix.
- Suppose that the optimal solution C does not satisfy the subspace-preserving property exactly but spectral clustering still yields a correct subspace clustering, then C would be refined towards being subspace-preserving in the next iteration.
- Suppose that the optimal solution C does not satisfy the subspace-preserving property exactly and spectral clustering does not yield a correct subspace clustering. In this case, the subspace segmentation matrix obtained in the previous step will refine the representation matrix and is also able to facilitate a better initialization for the next running of clustering.

In the first two cases, the optimal solution C_* obtained by S^3C would not be worse than that from the original SSC. In the third case, while not having any guarantee that the optimal solution C_* obtained by S^3C will improve over the original SSC, we observe in experiments that the clustering accuracy, the connectivity in the obtained affinity matrix, and the subspace-preserving property of the coefficient matrix C of S^3C improve over the original SSC when the parameters are set properly.

B. Role of Parameter α in S^3C

Recall that the subspace structured ℓ_1 norm $\|C\|_{1,Q}$ uses a tradeoff parameter α , i.e., $\|C\|_{1,Q} = \|C\|_1 + \alpha\|C\|_Q$. During iterations of S^3C , the parameter α balances how much we trust the previous segmentation matrix Q and the current SSC. To be more specific, a small α will give a solution of C that is close to that of SSC, whereas a large α will give a solution for C that is more dependent on the previous segmentation matrix Q . By using an appropriate α , we can allow SSC to provide a good initialization and then let the iterations improve based on better estimates of the segmentation matrix Q . Our experiments will evaluate the clustering performance of S^3C with respect to α and the effects of using the subspace structured norm $\|C\|_Q$ during iterations.

We observed that rather than using a fixed α to balance the two terms in the subspace structured ℓ_1 norm $\|C\|_{1,Q}$, the convergence could be accelerated by, e.g., using $\alpha \leftarrow \nu\alpha$, or using $\nu^{1-T}\|C\|_1 + \alpha\nu^{T-1}\|C\|_Q$ in Algorithm 2, where $\nu > 1$ and $T = 1, 2, \dots$ is the iteration index. By doing so, the previously estimated segmentation matrix Q (or subspace structure Θ) is increasingly emphasized during the iterations. Concretely, we will evaluate the performance of S^3C using the following three strategies to set the parameter α in experiments:

- Using a fixed α , i.e., using $\|C\|_{1,Q} = \|C\|_1 + \alpha\|C\|_Q$.
- Increasing α gradually during iterations, i.e., using $\|C\|_{1,Q} = \|C\|_1 + \alpha\nu^{T-1}\|C\|_Q$, where $\nu > 1$.
- Increasing α and at the same time gradually decreasing the ℓ_1 norm term during iterations, i.e., using $\nu^{1-T}\|C\|_1 + \alpha\nu^{T-1}\|C\|_Q$, where $\nu > 1$.

C. Stopping Criterion

While the problem solved by Algorithm 1 is a convex problem, there is no guarantee that the Algorithm 2 will converge to a global or local optimum because the solution for Q given (C, E) is obtained in an approximate manner by relaxing the objective function. Nonetheless, our experiments show that the algorithm does converge for proper settings of the parameters.

In practice, Algorithm 2 can be stopped by setting a maximum iteration number $T_{\max}$, or when the relative changes of subspace structure matrix Θ or coefficients matrix C_* in two consecutive iterations is small enough, i.e.,

$$\frac{\|\Theta^{(T)} - \Theta^{(T+1)}\|_1}{\|\Theta^{(T)}\|_1} < \epsilon_1, \quad (24)$$

$$\frac{\|C_*^{(T)} - C_*^{(T+1)}\|_1}{\|C_*^{(T)}\|_1} < \epsilon_2, \quad (25)$$

where $C_*^{(T)}$ is the optimal solution of C in problem (19) and $\Theta^{(T)}$ is the structure matrix Θ at the T -th iteration of Algorithm 2, respectively, in which $T = 1, 2, \dots$, $\epsilon_1 > 0$ and $\epsilon_2 > 0$.

In addition⁴, the subspace structured norm of C with respect

⁴Besides, the decrease of the optimal cost of k -means in spectral clustering between two consecutive iterations in Algorithm 2 can also be used as a stopping rule, i.e., we can stop Algorithm 2 if

$$\delta_*^{(T)} - \delta_*^{(T+1)} < \epsilon_4, \quad (26)$$

to Q , i.e., $\|C\|_Q$, is assumed to be monotonously decreasing. Thus, we can also stop Algorithm 2 when the decrease of $\|C_*\|_Q$ between two consecutive iterations is small enough, i.e.,

$$\|C_*^{(T)}\|_Q - \|C_*^{(T+1)}\|_Q < \epsilon_3, \quad (27)$$

where $\epsilon_3 > 0$.

Remark 6. When a fixed α is used, the relative changes in the objective function of problem (8), the relative changes in subspace structure matrix Θ as defined in (24), and the relative changes in coefficients matrix C_* as defined in (25) are useful to stop Algorithm 2. If parameter α is changed during iterations, however, the relative changes in objective function and the relative changes in coefficients matrix C_* would no longer be valid to stop Algorithm 2. As a remedy, we can use the stopping rule in (26) or (27), which virtually performs *model selection* for subspace clustering.

V. EXPERIMENTS

In this section, we evaluate the effectiveness of the proposed S^3C approach on a synthetic data set, a face clustering data set, a motion segmentation data set, and three cancer gene expression data sets.

Experimental Setup. Since that S^3C is a generalization of the standard SSC [28], we keep all settings in S^3C the same as that in SSC and thus the first iteration of hard S^3C is equivalent to a standard SSC. The S^3C specific parameters are set using $\nu^{1-T}\|C\|_1 + \alpha\nu^{T-1}\|C\|_Q$, where $\nu = 1.2$ and $T_{\max} = 10$ by default. In the hard S^3C , we set $\alpha = 0.1$; whereas in the soft S^3C , we set $\alpha = 1$. The λ and the ADMM parameters are kept the same for both S^3C and SSC. For each set of experiments, the average (and median) of subspace clustering error are recorded. The error (ERR) of subspace clustering is calculated by

$$ERR(\mathbf{a}, \hat{\mathbf{a}}) = 1 - \max_{\pi} \frac{1}{N} \sum_{i=1}^N 1_{\{\pi(\mathbf{a}) = \hat{\mathbf{a}}\}} \quad (28)$$

where $\mathbf{a}, \hat{\mathbf{a}} \in \{1, \dots, n\}^N$ are the original and estimated assignments of the columns in X to the n subspaces, and the maximum is with respect to all permutations

$$\pi : \{1, \dots, n\}^N \rightarrow \{1, \dots, n\}^N. \quad (29)$$

In addition to ERR, we also report the subspace-preserving rate (SPR) and the graph connectivity (CONN), which are defined as follows:

- SPR quantifies the degree to which the solution C satisfies the subspace-preserving property. For each column $\mathbf{c}_j$ of C , we compute the fraction of its ℓ_1 norm that comes from the correct subspaces and then average over all j , i.e.,

$$SPR = \frac{1}{N} \sum_j \left(\sum_i (w_{ij} \cdot |c_{ij}|) / \|\mathbf{c}_j\|_1 \right), \quad (30)$$

where $\delta_*^{(T)}$ is the optimal cost of k -means at iteration T of Algorithm 2 and $\epsilon_4 > 0$.

TABLE I
CLUSTERING ERRORS ON SYNTHETIC DATA SET. THE BEST RESULTS ARE IN BOLD FONT.

Corruptions (%)	0	10%	20%	30%	40%	50 %	60%	70%	80 %	90%
SSC	1.43	1.93	2.17	4.27	16.87	32.50	54.47	62.43	68.87	73.77
hard S³C	0.30	0.33	0.90	2.97	10.70	23.67	50.50	60.70	67.97	73.33
soft S³C	0.73	0.90	1.20	2.60	10.40	24.90	50.57	61.93	70.10	73.70

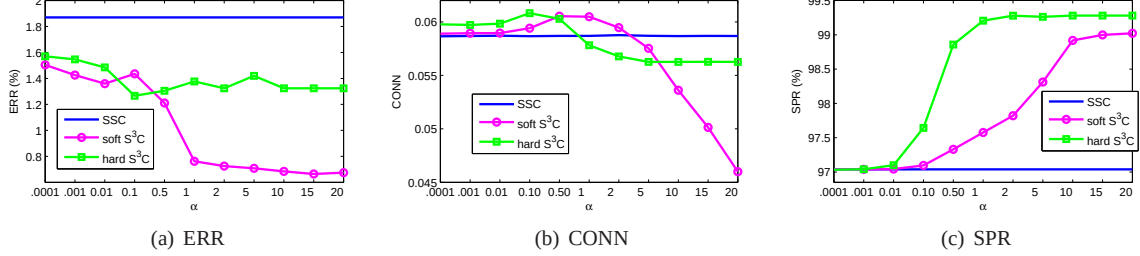


Fig. 1. Experimental evaluation on the behavior of S³C with varying value of parameter α . Panels (a)-(c) show the clustering error (ERR), the connectivity (CONN) and the subspace-preserving rate (SPR) of the affinity matrix as a function of parameter α , respectively.

where $w_{ij} \in \{0, 1\}$ is the ground truth affinity. By this definition, $\text{SPR} \in [0, 1]$ and is 1 if and only if C is subspace-preserving.

- CONN evaluates the improvements in connectivity of the proposed method. Generally, for an undirected graph with affinity matrix $A \in \mathbb{R}^{N \times N}$, the graph connectivity is defined as the second smallest eigenvalue of the Laplacian $L = \mathbf{I} - D^{-1/2} A D^{-1/2}$ where $D = \text{diag}(A \cdot \mathbf{1})$. The connectivity is in the range of $[0, \frac{N-1}{N}]$ and is zero if and only if the graph is not connected [66], [67]. We define CONN of an affinity matrix A as the average of CONN of the sub-graph corresponding to the points in one of the subspaces.

A. Experiments on Synthetic Data

Data Preprocessing. We construct n linear subspaces $\{S_j\}_{j=1}^n \subset \mathbb{R}^D$ of dimension d by choosing their bases $\{U_j\}_{j=1}^n$ as the top d left singular vectors of a random matrix $R_j \in \mathbb{R}^{D \times D}$. We sample N_j data points from each subspace $j = 1, \dots, n$ as $X_j = U_j Y_j$, where the entries of $Y_j \in \mathbb{R}^{d \times N_j}$ are i.i.d. samples from a standard Gaussian. Note that by doing so, the n linear subspaces are not necessarily orthogonal to each other. We then corrupt a certain percentage $p = 10 - 90\%$ of the entries of X_j chosen uniformly at random by adding Gaussian noise with zero mean and variance $0.3\|x\|$ to the selected entries. In our experiments, we set $D = 100$, $d = 5$, $N_j = 10$, $n = 15$, and repeat each experiment for 20 trials.

Experimental results are presented in Table I. We observe that both the hard S³C and the soft S³C algorithms consistently outperform SSC. The improvements of S³C from SSC are relatively more significant for the corruption in the range 10 – 50%. Compared to soft S³C, hard S³C performs slightly better. These results confirm the robustness and effectiveness of the proposed joint optimization approach.

B. Experiments on Extended Yale B Data Set

Given the face images of multiple subjects acquired under a fixed pose and varying illumination, we consider the problem

of clustering the images according to their subjects. It has been shown that, under the Lambertian assumption, the images of a subject with a fixed pose and varying illumination lie close to a linear subspace of dimension 9 [2]. Thus, the collection of face images of multiple subjects lie close to a union of 9-dimensional subspaces. In our experiments, we consider the Extended Yale Database B [68], which contains 2,414 frontal face images of 38 subjects, with approximately 64 frontal face images per subject taken under different illumination conditions. It should be noted that the Extended Yale B dataset is challenging for subspace clustering due to corruptions in the data caused by specular reflections.

Data Preprocessing. In our experiments, we follow the protocol introduced in [28]: a) each image is down-sampled to 48×42 pixels and then vectorized to a 2,016-dimensional data point; b) the 38 subjects are then divided into 4 groups – subjects 1-10, 11-20, 21-30, and 31-38. We perform experiments using all choices of $n \in \{2, 3, 5, 8, 10\}$ subjects in each of the first three groups and use all choices of $n \in \{2, 3, 5, 8\}$ from the last group. For S³C, SSC [28], LatLRR [69], and LRSC [32], we use the 2,016-dimensional vectors as inputs. For LatLRR and LRSC, we cite the results reported in [28] and [32], respectively. For LRR [29], LSR [33], and CASS [34], we use the procedure reported in [33]: use standard PCA to reduce the 2,016-dimensional data to $6n$ -dimensional data for $n \in \{2, 3, 5, 8, 10\}$.

Performance of S³C as a Function of α . To show the effect of the parameter α on the performance of S³C, we conduct experiments on all 163 choices of $n = 2$ subjects on the Extended Yale B data set with $\alpha \in \{0.0001, 0.001, 0.01, 0.1, 0.5, 1, 2, 5, 10, 15, 20\}$. For each α , we calculate the average ERR, CONN, and SPR over the 163 choices and present them as a function of α . Experimental results are shown in Fig. 1. We can observe that: a) Soft S³C can yield more accurate results when $\alpha > 0.1$; b) Using a middle value for α can improve CONN; c) By setting α not too small, SPR can be improved. Thus, a reasonable range for α in both algorithms is the interval $[0.1, 2]$. By default, we use

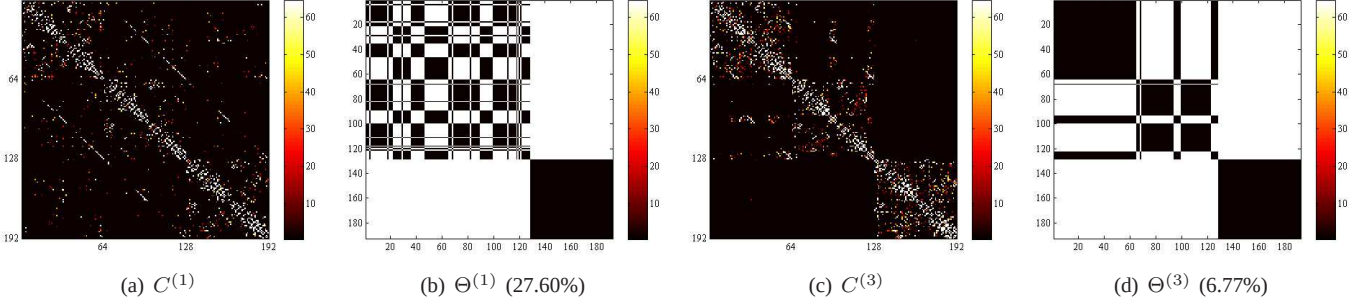


Fig. 2. Visualization of the representation matrix $C^{(t)}$ and structure matrix $\Theta^{(t)}$ in the first and third iterations of the hard S^3C algorithm. Note that the first iteration of hard S^3C is the same as that of SSC and hence the images of $C^{(1)}$ and $\Theta^{(1)}$ in panels (a) and (b) are the representation matrix and the structure matrix of SSC. The structure matrix $\Theta^{(t)}$ is used to re-weight the computation of the representation matrix $C^{(t+1)}$ in the next iteration. The images in panels (c) and (d) are the representation matrix $C^{(t)}$ and structure matrix $\Theta^{(t)}$ of the hard S^3C when converged ($t = 3$). The percentage numbers in brackets are the corresponding clustering errors. For ease of visualization, we computed the entry-wise absolute value and amplified each entry $|C_{ij}|$ and Θ_{ij} by a factor of 500.

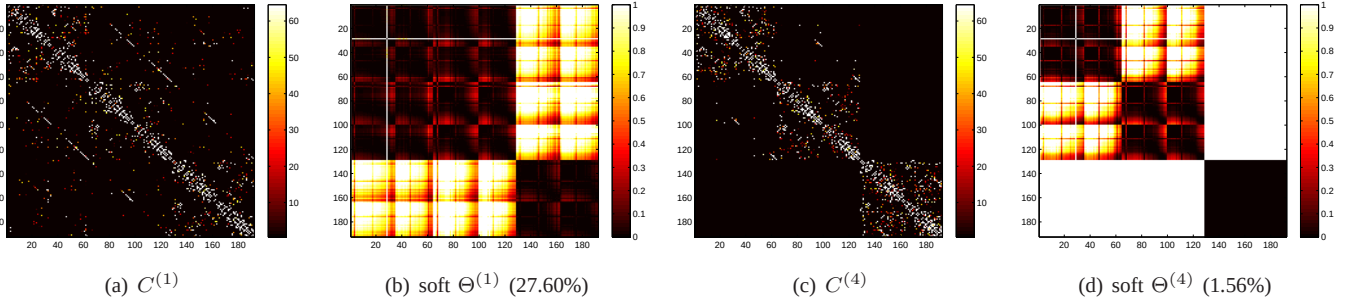


Fig. 3. Visualization of representation matrix $C^{(t)}$ and continuous real-valued structure matrix $\Theta^{(t)}$ in the first and the fourth iterations of the soft S^3C algorithm. The images of $C^{(1)}$ and the soft $\Theta^{(1)}$ in panels (a) and (b) are the representation matrix of SSC and the soft structure matrix computed from the results from SSC. The panels (c) and (d) show the representation matrix $C^{(t)}$ and the soft structure matrix $\Theta^{(t)}$ when converged ($t = 4$). The percentage numbers in bracket are the corresponding clustering errors. For ease of visualization, we computed the entry-wise absolute value and amplified each entry $|C_{ij}|$ by a factor of 500.

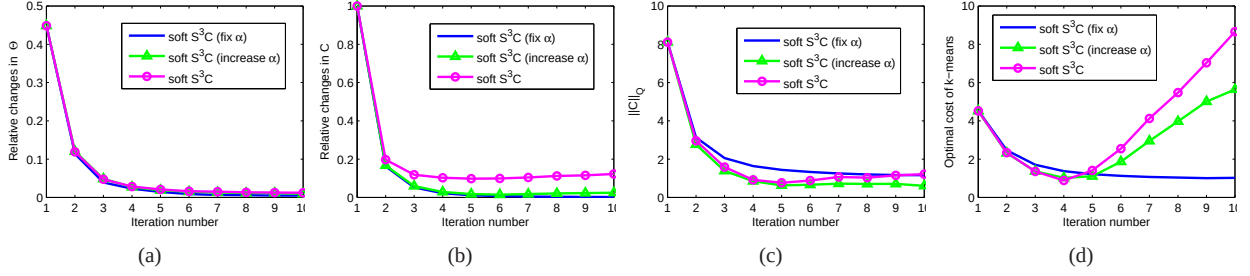


Fig. 4. Experimental evaluation on the convergence behavior of soft S^3C with three types of α settings. Panels (a) and (b) show relative changes of subspace structure matrix Θ and coefficient matrix C in two consecutive iterations, respectively. Panels (c) and (d) show subspace structured norm of C w.r.t. Q and the optimal cost of k -means in each iteration, respectively.

$\alpha = 0.1$ for the hard S^3C and $\alpha = 1$ for the soft S^3C .

Data Visualization: Hard Θ vs. Soft Θ . To show the effect of using the subspace structured ℓ_1 norm in S^3C , and especially the differences in using the hard and the soft Θ intuitively, we apply our S^3C algorithms to a subset of the Extended Yale B and visualize the representation matrix $C^{(t)}$ and the subspace structure matrix $\Theta^{(t)}$, which are taken in the t -th iteration. The visualization results are shown in Fig. 2 and Fig. 3.

We observe from Fig. 2 (a) that the structured sparse representation matrix $C^{(1)}$ – which is the same as that of SSC – is not block-diagonal and leads to a degenerate clustering result as shown by the “hard” subspace structure matrix $\Theta^{(1)}$ in Fig. 2 (b). In the third iteration ($t = 3$), hard S^3C yields a

much better representation matrix $C^{(3)}$, as shown in Fig. 2 (c), and hence produces a significantly improved clustering result as shown by the binary subspace structure matrix $\Theta^{(3)}$ in Fig. 2 (d). While hard S^3C in this case did not yield a perfect block-diagonal representation matrix, the improvements still reduce the clustering error from 27.60% to 6.77%.

Compared to the binary “hard” structure matrix Θ , as shown in Fig. 2 (b) and (d), the continuous real-valued “soft” structure matrix Θ , as shown in Fig. 3 (c) and (d), carries more detailed information about the confidence or uncertainty in the previous clustering results. Although it did not converge to an exact block diagonal matrix, the improved representation matrices $C^{(t)}$ ’s give more accurate clustering results. In this case, the

TABLE II

CLUSTERING ERRORS ON EXTENDED YALE B. THE BEST RESULTS ARE IN BOLD FONT. IN $S^3C^\dagger$ WE FIX α AS 0.1 FOR THE HARD VERSION AND 1.0 FOR THE SOFT VERSION, RESPECTIVELY; WHEREAS IN $S^3C^\ddagger$ WE USE $\alpha \leftarrow \nu\alpha$.

No. subjects ERR (%)	2 Average	Median	3 Average	Median	5 Average	Median	8 Average	Median	10 Average	Median
LRR	6.74	7.03	9.30	9.90	13.94	14.38	25.61	24.80	29.53	30.00
LSR1	6.72	7.03	9.25	9.90	13.87	14.22	25.98	25.10	28.33	30.00
LSR2	6.74	7.03	9.29	9.90	13.91	14.38	25.52	24.80	30.73	33.59
CASS	10.95	6.25	13.94	7.81	21.25	18.91	29.58	29.20	32.08	35.31
LRSC [32]	3.15	2.34	4.71	4.17	13.06	8.44	26.83	28.71	35.89	34.84
BDSSC [59]	3.90	-	17.70	-	27.50	-	33.20	-	39.53	-
BDLRR [59]	3.91	-	10.02	-	12.97	-	27.70	-	30.84	-
LatLRR	2.54	0.78	4.21	2.60	6.90	5.63	14.34	10.06	22.92	23.59
TSC [38]	8.06	-	9.00	-	10.14	-	12.58	-	17.86	-
OMP [37]	4.45	-	6.35	-	8.93	-	12.90	-	9.82	-
NSN[40]	1.71	0.00	3.63	-	5.81	-	8.46	-	9.82	-
SSC	1.87	0.00	3.35	0.78	4.32	2.81	5.99	4.49	7.29	5.47
hard $S^3C^\dagger$ [50]	1.43	0.00	3.09	0.52	4.08	2.19	4.84	4.10	6.09	5.16
hard $S^3C^\ddagger$ [50]	1.40	0.00	3.08	0.52	3.83	1.88	4.45	3.52	5.42	4.53
hard S^3C [50]	1.27	0.00	2.71	0.52	3.41	1.25	4.15	2.93	5.16	4.22
soft $S^3C^\dagger$	0.52	0.00	0.89	0.52	1.51	1.25	2.31	2.25	2.81	2.50
soft $S^3C^\ddagger$	0.51	0.00	0.94	0.52	1.65	1.56	2.54	2.34	2.92	2.97
soft S^3C	0.76	0.00	0.82	0.52	1.32	1.25	2.14	1.95	2.40	2.50

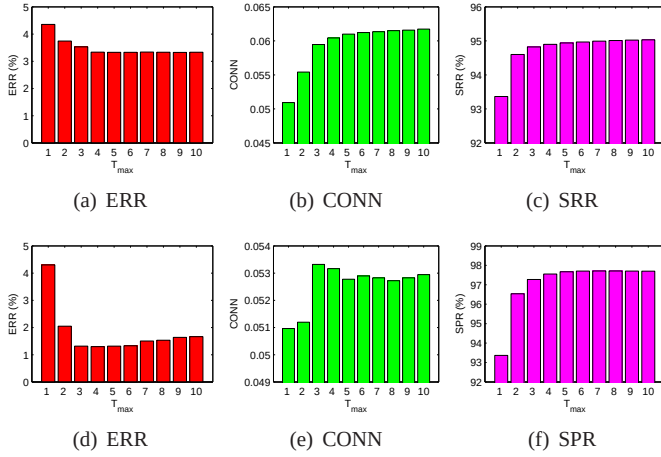


Fig. 5. Evaluation on effect of subspace sparse ℓ_1 norm during iterations of S^3C . Top row: hard S^3C ; Bottom row: soft S^3C

soft S^3C reduces the clustering error from 27.60% to 1.56%.

Convergence Behaviors. To show the convergence behaviors of Algorithm 2, we perform soft S^3C on the Extended Yale B data set for all choices of $n = 5$ with the parameter set to $\alpha = 1$. We calculate the relative changes of subspace structure matrix Θ as defined in (24), the relative changes of coefficients matrix C_* as in (25), and the subspace structured norm of C with respect to segmentation matrix Q (i.e., $\|C\|_Q$), and the optimal cost of k -means in spectral clustering, as a function of iteration number, respectively. Experimental results are presented in Fig. 4. As it can be observed from panels (a)-(c), the iterations in Algorithm 2 make coefficient matrix C and subspace structure matrix Θ as consistent as possible. In addition, the “elbow” shape tendency in panels (c) and (d) suggests that the subspace structured norm $\|C\|_Q$ and the optimal cost of k -means in spectral clustering can be used to perform model selection in S^3C .

Effect of Using the Subspace Structured ℓ_1 Norm. To

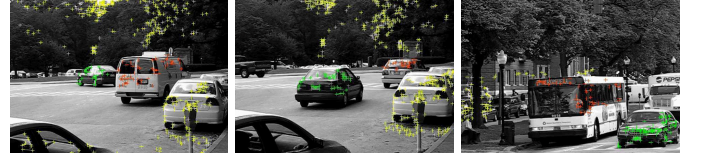


Fig. 6. Example frames from videos in the Hopkins 155 [70].

evaluate the effect of using the subspace structured ℓ_1 norm, we conduct experiments with S^3C on the Extended Yale B data set for all cases of $n = 5$, with the parameter set to $\alpha = 0.1$ for hard S^3C and $\alpha = 1$ for soft S^3C . We calculate the average ERR, CONN, and SPR as a function of the maximum iteration number. Experimental results are presented in Fig. 5. As it can be observed, the subspace-preserving property of the coefficients and the connectivity of the induced affinity matrix are improved during iterations. Note that the clustering errors are reduced remarkably in 2 or 3 iterations. This observation suggests that it is enough to stop our proposed S^3C algorithms in 2 or 3 iterations.

Comparison to State-of-the-art. We compare the clustering errors of our proposed two S^3C algorithms with SSC [28], LRR [29], LatLRR [69], LRSC [32], and other recently proposed algorithms, including LSR [33], CASS [34], and BDSSC [59], BDLRR [59], TSC [38], OMP [37], and NSN[40]. For BDSSC, BDLRR, TSC, OMP and NSN, we directly cite their best results. The full experimental results are presented in Table II. As it can be observed, the hard S^3C algorithm [50] outperforms all other algorithms in clustering errors across all experimental conditions, and the soft S^3C algorithm further reduce the clustering error significantly.

In addition, we also conduct experiments on the whole data set for all 38 subjects. In this condition, the average clustering error of SSC over 10 trials is 34.09%; whereas the average clustering errors of hard S^3C and soft S^3C are 27.04% and 19.82%, respectively. Note that the clustering error of soft S^3C reduces to 15.50% if we use $\alpha = 0.5$.

TABLE III
MOTION SEGMENTATION ERRORS ON HOPKINS 155 DATABASE. THE BEST RESULTS ARE IN BOLD FONT.

Methods		LSA	LRR	BDLRR	LSR1	LSR2	BDSSC	SSC	hard S ³ C	soft S ³ C
2 motions	Ave.	3.62	3.76	3.70	2.20	2.22	2.29	1.95	1.94	1.98
	ERR(%) Med.	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3 motions	Ave.	7.67	9.92	6.49	7.13	7.18	4.95	4.94	4.92	4.49
	ERR(%) Med.	1.27	1.42	1.20	2.40	2.40	0.91	0.89	0.89	0.90
Total	Ave.	4.53	5.15	4.33	3.31	3.34	2.89	2.63	2.61	2.54
	ERR(%) Med.	0.63	0.00	0.00	0.22	0.23	0.00	0.00	0.00	0.00

C. Experiments on Hopkins 155 Database

Motion segmentation refers to the problem of segmenting a video sequence with multiple rigidly moving objects into multiple spatiotemporal regions that correspond to the different motions in the scene (see Fig. 6). This problem is often solved by first extracting and tracking the spatial positions of a set of N feature points $\mathbf{x}_{fi} \in \mathbb{R}^2$ through each frame $f = 1, \dots, F$ of the video, and then clustering these feature point trajectories according to each one of the motions. Under the affine projection model, a feature point trajectory is formed by stacking the feature points $\mathbf{x}_{fi}$ in the video as $\mathbf{y}_i \doteq [\mathbf{x}_{1i}^\top, \mathbf{x}_{2i}^\top, \dots, \mathbf{x}_{Fi}^\top]^\top \in \mathbb{R}^{2F}$. Since the trajectories associated with a single rigid motion lie in an affine subspace of $\mathbb{R}^{2F}$ of dimension at most 3 [1], the trajectories of n rigid motions lie in a union of n low-dimensional subspaces of $\mathbb{R}^{2F}$. Therefore, the multi-view affine motion segmentation problem reduces to the subspace clustering problem.

We consider the Hopkins 155 database [70], which consists of 155 video sequences with 2 or 3 motions in each video corresponding to 2 or 3 low-dimensional subspaces. We compare our S³C algorithms with SSC [28], LSA [22], LRR [29], LSR [33], BDSSC [59] and BDLRR [59] on the Hopkins 155 motion segmentation data set [70] for the multi-view affine motion segmentation without other postprocessing. Experimental results are presented in Table III. Note that from the results in Table III, our S³C algorithms outperform SSC; however, due to the fact that the Hopkins 155 database has a relatively low noise level, the improvement in performance over SSC is relatively minor. Note that compared to hard S³C, soft S³C yields slightly better results because it captures more detailed information about the clustering results in the previous iterations by using continuous real-valued weights in Θ .

D. Experiments on Cancer Gene Data Sets

DNA microarray is a high-throughput technology that allows for simultaneously monitoring the mRNA levels of thousands of genes in particular cells or tissues [71], [72], [73]. An important application of cancer gene expression data is to identify or discover subtypes of cancers [74]. Gene expression data from different subtypes of cancers lie on multiple clusters [75], each one relating to one subtype. As pointed out in [76], each cluster can be well approximated by a low-dimensional subspace. If some genes expression profiles are known to have the same subtypes prior to performing an experiment, then this knowledge could be used as side-information. In this situation, we seek to cluster genes expression profiles with the help of side-information.

We consider three publicly available benchmark cancer data sets: St. Jude leukemia [77], Lung Cancer [78], and Novartis BPLC [79]. We compare the subspace clustering accuracy of CS³C with three popular subspace clustering methods: SSC [28], LRR [29], [76], LSR [33]. To prepare the side-information, we randomly sample a percentage ($p = 5\%, 10\%, 15\%$) of entries from the ground truth structure matrix Θ_0 whose entries encode the clustering membership. In CS³C, we encode the side-information into the matrix Ψ . We record the average clustering error (ERR) over 20 trials.⁵ Experimental results are presented in Table IV. Note that CS³C reduces to S³C if there is not side-information available. It can be observed that: a) with the help of side-information, CS³C can reduce the clustering errors notably; b) CS³C without side-information (i.e., side-info. 0%), which is essentially S³C, also matches or slightly outperforms SSC, LRR, and LSR.

VI. CONCLUSION

We proposed a joint optimization framework for the problem of subspace clustering, called Structured Sparse Subspace Clustering (S³C), in which the separate two stages of computing the sparse representation and applying the spectral clustering are elegantly combined. In addition, we extended the proposed S³C framework into Constrained Structured Sparse Subspace Clustering (CS³C) in which available partial side-information is incorporated into the stage of learning the affinity. We solved the problems efficiently via a combination of an alternating direction method of multipliers with spectral clustering. Experiments on a synthetic data set, the Extended Yale B data set, the Hopkins 155 motion segmentation database, and three cancer gene data sets demonstrated the effectiveness of our method.

ACKNOWLEDGMENT

C.-G. Li was partially supported by the National Natural Science Foundation of China under Grant No. 61273217 and the Scientific Research Foundation for the Returned Overseas Chinese Scholars, Ministry of Education of China. C. You and R. Vidal were supported by the National Science Foundation under Grant No. 1447822.

⁵In LRR, we use $\lambda = 1.4, 0.4$, and 1 for data set Leukemia, Lung Cancer, and Novartis, respectively. In LSR, we use $\lambda = 5, 0.14$, and 1 for data set Leukemia, Lung Cancer, and Novartis, respectively. In SSC, we set λ as in [28] that $\lambda = \frac{\gamma}{\min_j \max_{i: i \neq j} \{\|\mathbf{x}_i - \mathbf{x}_j\|\}}$, where $\gamma = 4, 10, 10$ for data set Leukemia, Lung Cancer, and Novartis, respectively.

TABLE IV
CLUSTERING ERROR (%) ON CANCERS DATA SETS. THE BEST RESULTS ARE IN BOLD FONT.

Data sets Side-info.(%)	Leukemia				Lung Cancer				Novartis BPLC			
	0%	5%	10%	15%	0%	5%	10%	15%	0%	5%	10%	15%
LRR	14.11	-	-	-	5.08	-	-	-	14.60	-	-	-
LSR	9.27	-	-	-	4.57	-	-	-	6.80	-	-	-
SSC	3.23	-	-	-	5.08	-	-	-	2.91	-	-	-
hard CS³C	2.42	1.33	0.58	0.24	4.06	3.81	3.50	2.94	2.91	2.33	1.17	0.44
soft CS³C	2.42	1.23	0.56	0.24	4.06	3.78	3.50	3.35	2.91	2.28	0.97	0.44

REFERENCES

- [1] C. Tomasi and T. Kanade, "Shape and motion from image streams under orthography," *International Journal of Computer Vision*, vol. 9, no. 2, pp. 137–154, 1992.
- [2] J. Ho, M. H. Yang, J. Lim, K. Lee, and D. Kriegman, "Clustering appearances of objects under varying illumination conditions," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2003.
- [3] W. Hong, J. Wright, K. Huang, and Y. Ma, "Multi-scale hybrid linear models for lossy image representation," *IEEE Transactions on Image Processing*, vol. 15, no. 12, pp. 3655–3671, 2006.
- [4] J. Costeira and T. Kanade, "A multibody factorization method for independently moving objects," *International Journal of Computer Vision*, vol. 29, no. 3, pp. 159–179, 1998.
- [5] S. Rao, R. Tron, R. Vidal, and Y. Ma, "Motion segmentation in the presence of outlying, incomplete, or corrupted trajectories," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 32, no. 10, pp. 1832–1845, 2010.
- [6] R. Vidal, Y. Ma, and S. Sastry, "Generalized Principal Component Analysis (GPCA)," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 27, no. 12, pp. 1–15, 2005.
- [7] L. Bako, "Identification of switched linear systems via sparse optimization," *Automatica*, vol. 47, no. 4, pp. 668–677, 2011.
- [8] A. Jalali, Y. Chen, S. Sanghavi, and H. Xu, "Clustering partially observed graphs via convex optimization," in *International Conference on Machine Learning*, 2011.
- [9] P. S. Bradley and O. L. Mangasarian, "k-plane clustering," *Journal of Global Optimization*, vol. 16, no. 1, pp. 23–32, 2000.
- [10] P. Tseng, "Nearest q -flat to m points," *Journal of Optimization Theory and Applications*, vol. 105, no. 1, pp. 249–252, 2000.
- [11] T. Zhang, A. Szlam, and G. Lerman, "Median k -flats for hybrid linear modeling with many outliers," in *Workshop on Subspace Methods*, 2009, pp. 234–241.
- [12] P. Agarwal and N. Mustafa, "k-means projective clustering," in *ACM Symposium on Principles of database systems*, 2004.
- [13] Y. Ma, A. Y. Yang, H. Derksen, and R. Fossom, "Estimation of subspace arrangements with applications in modeling and segmenting mixed data," *SIAM Review*, vol. 50, no. 3, pp. 413–458, 2008.
- [14] K. Huang, Y. Ma, and R. Vidal, "Minimum effective dimension for mixtures of subspaces: A robust GPCA, algorithm and its applications," in *IEEE Conference on Computer Vision and Pattern Recognition*, vol. II, 2004, pp. 631–638.
- [15] M. C. Tsakiris and R. Vidal, "Algebraic clustering of affine subspaces," *ArXiv*, 2015.
- [16] T. Boult and L. Brown, "Factorization-based segmentation of motions," in *IEEE Workshop on Motion Understanding*, 1991, pp. 179–186.
- [17] A. Leonardis, H. Bischof, and J. Maver, "Multiple eigenspaces," *Pattern Recognition*, vol. 35, no. 11, pp. 2613–2627, 2002.
- [18] C. Archambeau, N. Delannay, and M. Verleysen, "Mixtures of robust probabilistic principal component analyzers," *Neurocomputing*, vol. 71, no. 7–9, pp. 1274–1282, 2008.
- [19] A. Gruber and Y. Weiss, "Multibody factorization with uncertainty and missing data using the EM algorithm," in *IEEE Conference on Computer Vision and Pattern Recognition*, vol. I, 2004, pp. 707–714.
- [20] Y. Ma, H. Derksen, W. Hong, and J. Wright, "Segmentation of multivariate mixed data via lossy coding and compression," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 29, no. 9, pp. 1546–1562, 2007.
- [21] A. Y. Yang, S. Rao, and Y. Ma, "Robust statistical estimation and segmentation of multiple subspaces," in *Workshop on 25 years of RANSAC*, 2006.
- [22] J. Yan and M. Pollefeys, "A general framework for motion segmentation: Independent, articulated, rigid, non-rigid, degenerate and non-degenerate," in *European Conference on Computer Vision*, 2006, pp. 94–106.
- [23] A. Goh and R. Vidal, "Segmenting motions of different types by unsupervised manifold clustering," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2007.
- [24] Z. Fan, J. Zhou, and Y. Wu, "Multibody grouping by inference of multiple subspaces from high-dimensional data using oriented-frames," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 28, no. 1, pp. 91–105, 2006.
- [25] G. Chen and G. Lerman, "Spectral curvature clustering (SCC)," *International Journal of Computer Vision*, vol. 81, no. 3, pp. 317–330, 2009.
- [26] T. Zhang, A. Szlam, Y. Wang, and G. Lerman, "Hybrid linear modeling via local best-fit flats," *International Journal of Computer Vision*, vol. 100, no. 3, pp. 217–240, 2012.
- [27] E. Elhamifar and R. Vidal, "Sparse subspace clustering," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2009, pp. 2790–2797.
- [28] —, "Sparse subspace clustering: Algorithm, theory, and applications," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 11, pp. 2765–2781, 2013.
- [29] G. Liu, Z. Lin, and Y. Yu, "Robust subspace segmentation by low-rank representation," in *International Conference on Machine Learning*, 2010, pp. 663–670.
- [30] G. Liu, Z. Lin, S. Yan, J. Sun, and Y. Ma, "Robust recovery of subspace structures by low-rank representation," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 1, pp. 171–184, Jan 2013.
- [31] P. Favaro, R. Vidal, and A. Ravichandran, "A closed form solution to robust subspace estimation and clustering," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2011, pp. 1801–1807.
- [32] R. Vidal and P. Favaro, "Low rank subspace clustering (LRSC)," *Pattern Recognition Letters*, vol. 43, pp. 47–61, 2014.
- [33] C.-Y. Lu, H. Min, Z.-Q. Zhao, L. Zhu, D.-S. Huang, and S. Yan, "Robust and efficient subspace segmentation via least squares regression," in *European Conference on Computer Vision*, 2012.
- [34] C. Lu, Z. Lin, and S. Yan, "Correlation adaptive subspace segmentation by trace lasso," in *IEEE International Conference on Computer Vision*, 2013.
- [35] C. Lu, S. Yan, and Z. Lin, "Correntropy induced l2 graph for robust subspace clustering," in *IEEE International Conference on Computer Vision*, 2013.
- [36] Y.-X. Wang, H. Xu, and C. Leng, "Provable subspace clustering: When LRR meets SSC," in *Neural Information Processing Systems*, 2013.
- [37] E. L. Dyer, A. C. Sankaranarayanan, and R. G. Baraniuk, "Greedy feature selection for subspace clustering," *Journal of Machine Learning Research*, vol. 14, no. 1, pp. 2487–2517, 2013.
- [38] R. Heckel and H. Bölskei, "Robust subspace clustering via thresholding," *CoRR*, vol. abs/1307.4891, 2013.
- [39] Y. Zhang, Z. Sun, R. He, and T. Tan, "Robust subspace clustering via half-quadratic minimization," in *IEEE International Conference on Computer Vision*, 2013, pp. 3096–3103.
- [40] D. Park, C. Caramanis, and S. Sanghavi, "Greedy subspace clustering," in *Neural Information Processing Systems*, 2014.
- [41] B. Li, Y. Zhang, Z. Lin, and H. Lu, "Subspace clustering by mixture of gaussian regression," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2015.
- [42] R. Vidal, "Subspace clustering," *IEEE Signal Processing Magazine*, vol. 28, no. 3, pp. 52–68, March 2011.
- [43] M. Fazel, "Matrix rank minimization with applications," Ph.D. dissertation, Stanford University, 2002.
- [44] E. Grave, G. Obozinski, and F. Bach, "Trace lasso: a trace norm regularization for correlated designs," in *Neural Information Processing Systems*, 2011.
- [45] C. You, D. Robinson, and R. Vidal, "Scalable sparse subspace clustering by orthogonal matching pursuit," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2016.

- [46] D. Luo, F. Nie, C. H. Q. Ding, and H. Huang, "Multi-subspace representation and discovery," in *ECML/PKDD*, 2011, pp. 405–420.
- [47] C. You, C.-G. Li, D. Robinson, and R. Vidal, "Oracle based active set algorithm for scalable elastic net subspace clustering," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2016.
- [48] D. Pham, S. Budhadiya, D. Phung, and S. Venkatesh, "Improved subspace clustering via exploitation of spatial constraints," in *CVPR*, 2012.
- [49] H. Hu, Z. Lin, J. Feng, and J. Zhou, "Smooth representation clustering," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2014.
- [50] C.-G. Li and R. Vidal, "Structured sparse subspace clustering: A unified optimization framework," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2015, pp. 277–286.
- [51] R. Vidal, Y. Ma, and S. Sastry, *Generalized Principal Component Analysis*. Springer Verlag, 2016.
- [52] S. Boyd, N. Parikh, E. Chu, B. Peleato, and J. Eckstein, "Distributed optimization and statistical learning via the alternating direction method of multipliers," *Foundations and Trends in Machine Learning*, vol. 3, no. 1, pp. 1–122, 2010.
- [53] Z. Lin, M. Chen, L. Wu, and Y. Ma, "The augmented Lagrange multiplier method for exact recovery of corrupted low-rank matrices," *arXiv:1009.5055v2*, 2011.
- [54] M. Soltanolkotabi and E. J. Candès, "A geometric analysis of subspace clustering with outliers," *Annals of Statistics*, vol. 40, no. 4, pp. 2195–2238, 2012.
- [55] M. Soltanolkotabi, E. Elhamifar, and E. J. Candès, "Robust subspace clustering," *Annals of Statistics*, vol. 42, no. 2, pp. 669–699, 2014.
- [56] Y.-X. Wang and H. Xu, "Noisy sparse subspace clustering," in *International Conference on Machine Learning*, 2013.
- [57] Y. Wang, Y. Wang, and A. Singh, "A deterministic analysis of noisy sparse subspace clustering for dimensionality-reduced data," in *Proceedings of the 32nd International Conference on Machine Learning*, 2015, pp. 1422–1431.
- [58] E. Candès, M. Wakin, and S. Boyd, "Enhancing sparsity by reweighted ℓ_1 minimization," *Journal of Fourier Analysis and Applications*, vol. 14, no. 5, pp. 877–905, 2008.
- [59] J. Feng, Z. Lin, H. Xu, and S. Yan, "Robust subspace segmentation with block-diagonal prior," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2014.
- [60] X. Guo, "Robust subspace segmentation by simultaneously learning data representations and their affinity matrix," in *Proceedings of the 24th International Conference on Artificial Intelligence*, 2015, pp. 3547–3553.
- [61] Z. Fang, J. Yang, Y. Li, Q. Luo, L. Liu, and et al., "Knowledge guided analysis of microarray data," *Journal of Biomedical Informatics*, vol. 39, no. 4, pp. 401–411, 2006.
- [62] P. Chopra, J. Kang, J. Yang, H. Cho, H. Kim, and M. Lee, "Microarray data mining using landmark gene-guided clustering," *BMC Bioinformatics*, vol. 9, no. 1, p. 92, 2008.
- [63] D. Huang and W. Pan, "Incorporating biological knowledge into distance-based clustering analysis of microarray gene expression data," *Bioinformatics*, vol. 22, no. 10, pp. 1259–1268, 2006.
- [64] E. Bair, "Semi-supervised clustering methods," *Wiley Interdisciplinary Reviews: Computational Statistics*, vol. 5, no. 5, pp. 349–361, 2013.
- [65] J. Shi and J. Malik, "Normalized cuts and image segmentation," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 22, no. 8, pp. 888–905, 2000.
- [66] M. Fiedler, "A property of eigenvectors of nonnegative symmetric matrices and its application to graph theory," *Czech. Math. J.*, vol. 25, pp. 619–633, 1975.
- [67] F. Chung, "Spectral graph theory," in *CBMS Regional Conference Series in Mathematics*. American Mathematical Society and Conference Board of the Mathematical Sciences, 1997, vol. 92.
- [68] A. Georghiades, P. Belhumeur, and D. Kriegman, "From few to many: Illumination cone models for face recognition under variable lighting and pose," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 23, no. 6, pp. 643–660, 2001.
- [69] G. Liu and S. Yan, "Latent low-rank representation for subspace segmentation and feature extraction," *International Conference on Computer Vision*, 2011.
- [70] R. Tron and R. Vidal, "A benchmark for the comparison of 3-D motion segmentation algorithms," in *IEEE Conference on Computer Vision and Pattern Recognition*, 2007, pp. 1–8.
- [71] D. Lockhart and E. Winzeler, "Genomics, gene expression, and dna arrays," *Nature*, vol. 405, pp. 827–836, 2000.
- [72] M. Schena, D. Shalon, R. Davis, and P. Brown, "Quantitative monitoring of gene expression patterns with a complementary dna microarray," *Science*, vol. 270, pp. 467–470, 1995.
- [73] A. Schulze and J. Downward, "Navigating gene expression using microarrays – a technology review," *Nat. Cell Biol.*, vol. 3, pp. E190–E195, 2001.
- [74] T. Golub, D. Slonim, P. Tamayo, C. Huard, M. Gaasenbeek, J. Mesirov, H. Coller, M. Loh, J. Downing, M. Caligiuri, C. Bloomfield, and E. Lander, "Molecular classification of cancer: class discovery and class prediction by genes expression monitoring," *Science*, vol. 286, no. 5439, pp. 531–537, 1999.
- [75] U. Alon, N. Barkai, D. Notterman, K. Gish, S. Ybarra, D. Mack, and A. Levine, "Broad patterns of gene expression revealed by clustering analysis of tumor and normal colon tissues probed by oligonucleotide arrays," *PNAS*, vol. 96, no. 12, pp. 6745–6750, 1999.
- [76] Y. Cui, C.-H. Zheng, and J. Yang, "Identifying subspace gene clusters from microarray data using low-rank representation," *Plos ONE*, vol. 8, no. 3, p. e59377, 2013.
- [77] E. J. Yeoh, M. E. Ross, S. A. Shurtleff, and et al., "Classification, subtype discovery, and prediction of outcome in pediatric acute lymphoblastic leukemia by gene expression profiling," *Cancer Cell*, vol. 1, pp. 133–143, 2002.
- [78] A. Bhattacharjee, W. Richards, J. Staunton, and et al., "Classification of human lung carcinomas by mrna expression profiling reveals distinct adenocarcinomas sub-classes," vol. 98, no. 24, pp. 13,790–13,795, 2001.
- [79] A. I. Su, M. P. Cooke, K. A. Ching, and et al., "Large-scale analysis of the human and mouse transcriptomes," vol. 99, no. 7, pp. 4447–4465, 2002.